Product datasheet

HMI 1200 W/DXS

HMI Double End Lamps



Areas of application

- Studio, TV, & Film
- Professional & High Speed Photography
- Solar Simulation

Product features and benefits

- High intensity light providing true color performance with CRI up to 90
- Color temperature approximately 6000 K - simulates daylight
- Robust design provides durability during transport
- High energy efficiency providing up to 100 lumens/watt
- Capable of hot restrike ignition
- Compression sealed base provides enhanced durability
- High energy efficiency providing up to 100 lm/W
- Broad spectrum suitable for solar simulation applications









© 2026, OSRAM GmbH. All rights reserved.

Technical data

General Product Information

Product number (Americas)	55139
Product name (Americas)	HMI 1200W/DXS 10/CS 1/SKU
Family brand	HMI
Global order reference	HMI 1200 W/DXS


Electrical Data

Nominal wattage	1200 W
Nominal voltage	100 V
Nominal current	13.8 A
Type of current	AC

Photometric Data

Nominal luminous flux	110000 lm
Color temperature	6000 K
Color rendering index Ra	> 90

Physical Attributes & Dimensions

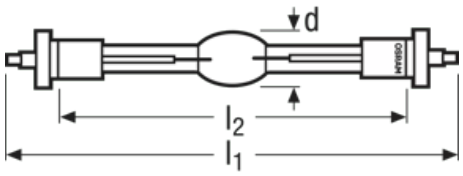

Lamp base	SFc15.5
Diameter (in)	1.063 in
Diameter	27.0 mm
Length	220.0 mm
Length with base excl. base pins/connection	180.00 mm
Product weight	104.00 g

Operating Conditions

Burning position	Any

© 2026, OSRAM GmbH. All rights reserved.

Lifetime Data

Nominal lifetime	1000 hr

Environmental & Regulatory Information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACh)	
Primary article identifier	4008321931153
Declaration no. in SCIP database	No declarable substances contained
Candidate list substance 1	No declarable substances contained

Country specific information

Product code	METEL code	SEG-No.	STK number	UK Org
4008321931153	OSRHMI1200DXS	-	4836421	-

© 2026, OSRAM GmbH. All rights reserved.

Safety advice

Because of their high luminance, UV radiation and high internal pressure during operation, HMI lamps may only be operated in enclosed lamp casings specially constructed for the purpose. Appropriate filters must ensure that UV radiation is reduced to an acceptable level. Mercury is released if the lamp breaks. Special safety precautions must be taken. Information on safety and handling is available on request or can be found in the leaflet included with the lamp or in the operating instructions.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321931153	HMI 1200 W/DXS	Shipping carton box 1	115 mm x 82 mm x 305 mm	2.88 dm^3	253.00 g
4052899501355	HMI 1200 W/DXS		- x - x -	32.51 dm^3	

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

© 2026, OSRAM GmbH. All rights reserved.